





# TSCALE BWS-DSS series

## STAINLESS STEEL PLATFORM SCALES

**Various SANS 1649 approved Stainless Steel platform scales for your specific weighing requirement**

Complete stainless steel specially designed for intensive use, in harsh environments meeting the strictest requirements in terms of hygiene and cleanliness. The scales are equipped with a single point fully stainless steel ZEMIC and SANS1649 approved load cell to achieve optimum reliability & accuracy

Model	Dimensions & Height	Max Capacity	Top Plate
<b>BWS DSS-3030 – bench type</b>	(W)30cm x (D)30cm x (H)30cm	6kg x 1g/2g or 15kg x 2g/5g	S/S T=1.0mm
<b>BWS DSS-3030 – bench type</b>	(W)30cm x (D)30cm x (H)30cm	30kg x 5g/10g	S/S T=1.0mm
<b>BWS DSS-4050 – floor type</b>	(W)40cm x (D)50cm x (H)60cm	60kg x 10g/20g	S/S T=1.2mm
<b>BWS DSS-4050 – floor type</b>	(W)40cm x (D)50cm x (H)60cm	150kg x 20g/50g	S/S T=1.2mm
<b>BWS DSS-6060 – floor type</b>	(W)60cm x (D)70cm x (H)60cm	300kg x 50g/100g	S/S T=1.2mm

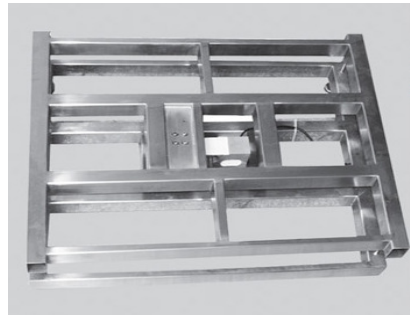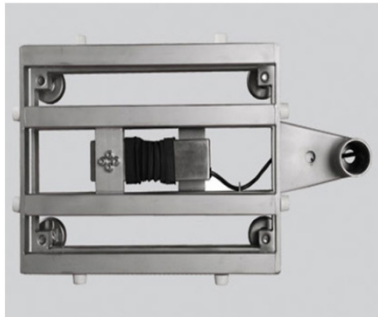

### Indicator Specifications:

- ❖ Display: 52mm LCD display with white LED backlight
- ❖ Operating temp: -10C - +40C
- ❖ Housing: IP65 304 stainless steel
- ❖ Max divisions: 6000 - 15000 divisions
- ❖ Power: 220 VAC mains with built-in rechargeable batt.
- ❖ Keyboard: 7 key mechanical switch
- ❖ Functions include: check weighing, accumulate, etc.
- ❖ RS232 output for PC, printer

### Platform Specifications:

- ❖ M10mm stainless steel leveling feet
- ❖ SUS 304 Stainless steel construction
- ❖ Operating Temperature: -10 - 40C
- ❖ Option 1: IP68 Stainless steel loadcells  
304 Stainless steel hermetically sealed loadcells
- ❖ Option 2: IP67 Alloy steel loadcells  
Alloy steel adhesive sealed