

BWS Waterproof Weighing Indicator

General Specifications

- | | |
|--------------------------------|---|
| • Display | 52mm digit LCD display, with white LED backlight |
| • Keyboard | 7keys(Mechanical switch) |
| • Housing | SST |
| • Max. Divisions | 6,000e; 30,000d |
| • Load cell excitation voltage | 5V/150mA |
| • ADC update | ≤1/10 second |
| • Operate Temp | -10°C~+40°C |
| • Power | 220VAC mains power , rechargeable battery (6V/4Ah) |
| • Gross weight | 3.2kg |



- Easy to use-front panel configuration
- Application: 1. Zero 2. Accumulation 3. Check weighing 4. Net/gross shift 5. Weighing units conversion
- OIML approval from Delta(approval no.:DK0199.165)
- Keyboard lock function
- IP65 waterproof rate
- Selectable 1.2" LED display(BWS-E)
- Optional RS-232 interface, Blue tooth
- Optional analog output (0-10V/4-20mA)
- Optional setpoint output (HI/OK/LOW/BEEP)




BWS Waterproof Weighing Indicator

Model Number	Capacity	Readability	Division	Approx. weight	Approval
BWS	X	X	30,000d	2.0kg	CE
BWS-M	X	X	6,000e	2.0kg	CE, OIML
BWS-E	X	X	30,000d	3.2kg	CE

Options



Dimensions(mm)

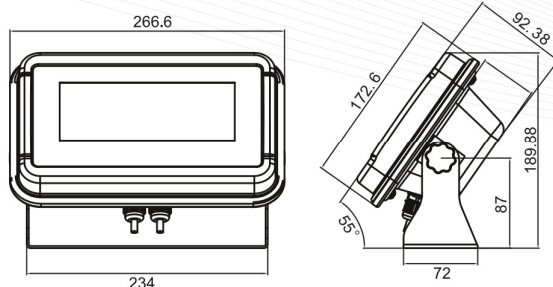

Print formats

NO.: 1
GS: 4.240KG

DATE: 2012/03/07
TIME: 19:06:37
NO.: 1
GS: 4.235KG

DATE: 2012/03/07
TIME: 19:08:26
NO.: 2
NT: 4.235KG
TW: 1.810KG
GW: 6.045KG

DATE: 2012/03/07
TIME: 19:10:54
TOTAL

NO: 3
Total: 12.705KG

DATE: 2012/03/07
TIME: 19:09:03
NO.: 1
GS: 4.235KG
TOTAL: 4.235KG

DATE: 2012/03/07
TIME: 19:10:48
NO.: 3
NT: 4.235KG
TW: 1.810KG
GW: 6.045KG
TOTAL: 12.705KG